


Sports Medicine





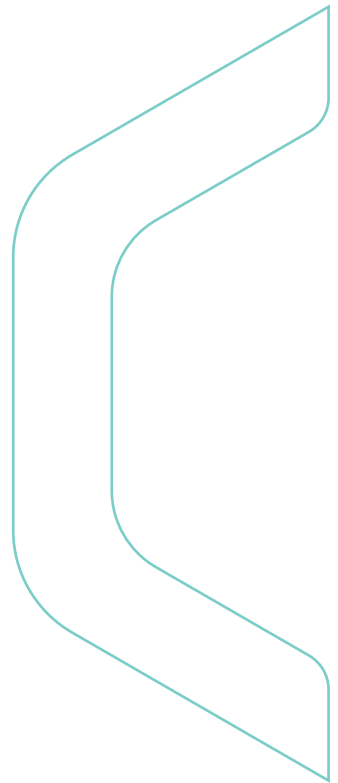

Sports Medicine

Index

- 02 Full HD Camera
- 02 STD Camera - High Resolution
- 03 Optics
- 03 Trocater
- 04 Light Source
- 04 Arthroscopy Pump
- 05 Shaver
- 05 Shaver Blades
- 06 Cannulas
- 06 Arthrosmart Anchor® - Titanium Anchor with Disposable Applicator
- 07 Interference Screws
- 07 Transverse Screw
- 08 OutIn® - Instrumental for Anatomic Ligament Reconstruction
- 09 Ligfix® - Ligament Fixing System

Full HD Camera

Video Camera for Endoscopic Applications



- Full HD camera with resolution of 1920x1080 pixels;
- Three control functions available on the handpiece: Freeze, Zoom In and Zoom Out Digital;
- Screen on Touch Screen;
- Automatic bi-volt;
- DVI Output.

STD Camera - High Resolution

Video Camera for Endoscopic Applications



- High resolution camera 752x582 pixels;
- Lightweight (43g) ergonomic handpiece with focus adjustment;
- Automatic bi-volt;
- VBS Output.

Optics

Rigid Endoscope for Arthroscopy



- Optics for knee, shoulder and small joints;
- Same optical for both Full HD and STD cameras;
- Diameters of Ø2.7mm and Ø4.0mm;
- Lengths of 110mm, 175mm and 187.5mm;
- Angulations of 0°, 30°, 45° and 70°.

Ref. Ø x Length x Angle

A.2711000	Ø2.7 x 110mm
A.2718700	Ø2.7 x 187,5mm
A.2711030	Ø2.7 x 110mm – 30°
A.2718730	Ø2.7 x 187,5mm – 30°
A.4000	Ø4.0 x 175mm
A.4030	Ø4.0 x 175mm – 30°
A.4045	Ø4.0 x 175mm – 45°
A.4070	Ø4.0 x 175mm – 70°

Trocater

Trocater Sleeve with Two Valves



- Change with 2 diameter options: Ø2.7mm and Ø4.0mm;
- Lengths of 110mm, 175mm and 187.5mm;
- 2 tip options: Conical and Pyramidal.

Ref. Description

A2.519	Change Sleeve with two valves 2,7 mm x 110 mm
A2.520	Pyramid tip 2,7 mm x 110 mm
A2.521	Tapered tip 2,7 mm x 110 mm
A2.409	Replace Sleeve with two valves 2,7 mm x 187,5 mm
A2.410	Pyramid tip 2,7 mm x 187,5 mm
A2.411	Tapered tip 2,7 mm x 187,5 mm
A2.546	Replace Sleeve with two valves 4 mm x 175 mm
A2.547	Conical tip 4 mm x 175 mm
A2.548	Pyramid point 4 mm x 175 mm



Light Source

Light Source with High Power LED or Xenom Emitter



Cape of Light

Ref.
LG.009 - 2,3 meters
LG.010 - 3 meters

- Led with 180w power;
- Xenom with 300w power;
- Sterile optical fiber cable;
- Automatic bi-volt.

LED Light Source

Ref.	Power
200LED-10	100W
400LED-10	180W

Xenom Light Source

Ref.	Power
180X-10	180W
300X-10	300W



Arthroscopy Pump

Fluid Pump for Arthroscopy



Single Use Equipment

Ref.
5201-63



Remote Control

Ref.
5201-50

- Remote Control;
- Flush function for temporary flow of 2l / min;
- Height adjustment, 2 integrated sensors for pressure reading;
- Single use equipment.

Arthroscopy Pump

Ref.
5201-20

Shaver

Shaver for Arthroscopy

Ref.
SV-8002



- Wireless foot switch or control;
- Connects up to two handpieces;
- Rotation up to 8,000rpm in continuous mode;
- Rotation of 5,000rpm in oscillatory mode.



Ref.
SH-8008

Hand Piece



Ref.
SF-8005 - Wired
SF-8005B - Wireless

Pedal

Shaver Blades

Disposable Blades for Arthroscopy



- Fitting LV2, S2 and D2;
- Lengths of 115mm, 175mm, 230mm and 300mm;
- Diameters of Ø2.5, Ø3.0, Ø3.5, Ø4.2, Ø5, .5, Ø6.0 and Ø7.0mm;
- Single use sterile product.



Contact us for available codes and models

Cannulas

Disposable Cannula for Arthroscopy




- Diameters: 5.5mm, 6.5mm and 8.5mm;
- Lengths: 70mm, 90mm and 110mm;
- Single use sterile product.

Ref.	Ø x Length
AS.20.00.55090	Ø5,5 x 090mm
AS.20.00.65070	Ø6,5 x 070mm
AS.20.00.65090	Ø6,5 x 0 90mm
AS.20.00.85070	Ø8,5 x 070mm
AS.20.00.85090	Ø8,5 x 090mm
AS.20.00.85110	Ø8,5 x 110mm

Arthrosmart Anchor®

Titanium Anchor with Disposable Applicator

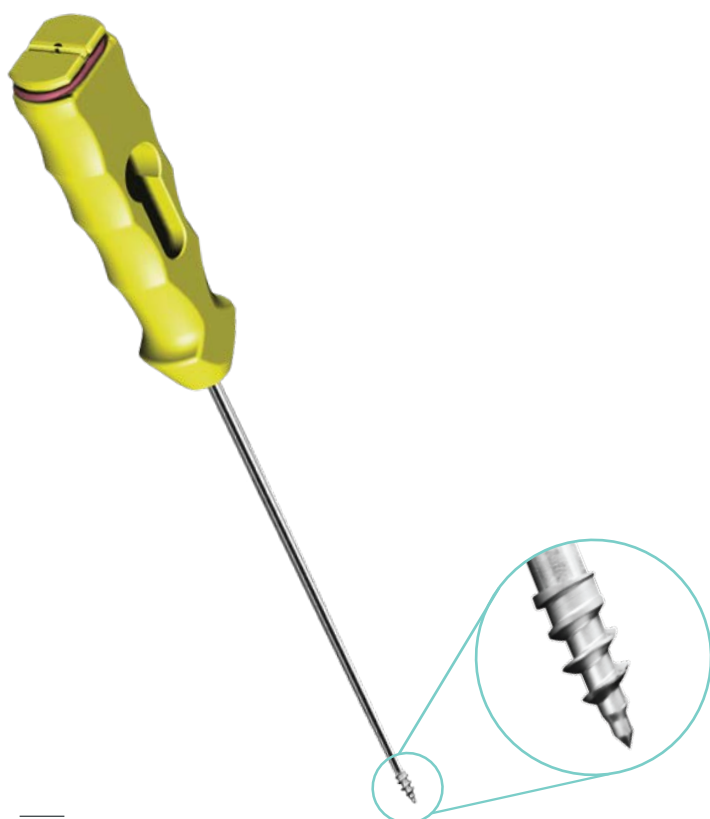

- Titanium self-tapping screw (6Al4V alloy), providing increased pullout resistance;
- Disposable applicator, facilitating the insertion technique;
- Mounted with two non-absorbable suture ends (Fiber®), with high breaking strength;
- Screw-type anchors available in diameters of 2.0 mm, 2.7 mm, 3.5 mm, 4.0 mm and 5.0 mm for indication of use in ATM, hand, wrist, elbow, shoulder, foot, ankle, knee and hip

TiAlV		
Ref.	Ø Anchor	Applicator
39.44.04.00020	Ø 2,0 mm	Standard
39.44.04.00027	Ø 2,7 mm	Standard
39.44.04.00035	Ø 3,5 mm	Standard
39.44.04.00040	Ø 4,0 mm	Standard
39.44.04.00050	Ø 5,0 mm	Standard

with Needle		
39.44.03.10020	Ø 2,0 mm	Short
39.44.03.10027	Ø 2,7 mm	Short
39.44.03.00035	Ø 3,5 mm	Standard
39.44.03.00040	Ø 4,0 mm	Standard
39.44.03.00050	Ø 5,0 mm	Standard



Interference Screws

Titanium



TiAlV

Ref.No.	Ø x Length
04.24.16.07020	Ø7 x 20mm
04.24.16.07025	Ø7 x 25mm
04.24.16.07030	Ø7 x 30mm
04.24.16.08020	Ø8 x 20mm
04.24.16.08025	Ø8 x 25mm
04.24.16.08030	Ø8 x 30mm
04.24.16.09020	Ø9 x 20mm
04.24.16.09025	Ø9 x 25mm
04.24.16.09030	Ø9 x 30mm
04.24.16.10020	Ø10 x 20mm
04.24.16.10025	Ø10 x 25mm
04.24.16.10030	Ø10 x 30mm

Optional

Ref.No.	Ø x Length
04.24.16.07035	Ø7 x 35mm
04.24.16.07040	Ø7 x 40mm
04.24.16.07045	Ø7 x 45mm
04.24.16.07050	Ø7 x 50mm
04.24.16.08035	Ø8 x 35mm
04.24.16.08040	Ø8 x 40mm
04.24.16.08045	Ø8 x 45mm
04.24.16.08050	Ø8 x 50mm
04.24.16.09035	Ø9 x 35mm
04.24.16.09040	Ø9 x 40mm
04.24.16.09045	Ø9 x 45mm
04.24.16.09050	Ø9 x 50mm
04.24.16.10035	Ø10 x 35mm
04.24.16.10040	Ø10 x 40mm
04.24.16.10045	Ø10 x 45mm
04.24.16.10050	Ø10 x 50mm

PEEK - Sterile



PEEK

Ref.No.	Ø x Length
04.43.12.06020	Ø6 x 20mm
04.43.12.06025	Ø6 x 25mm
04.43.12.06030	Ø6 x 30mm
04.43.12.07020	Ø7 x 20mm
04.43.12.07025	Ø7 x 25mm
04.43.12.07030	Ø7 x 30mm
04.43.12.08020	Ø8 x 20mm
04.43.12.08025	Ø8 x 25mm
04.43.12.08030	Ø8 x 30mm
04.43.12.09020	Ø9 x 20mm
04.43.12.09025	Ø9 x 25mm
04.43.12.09030	Ø9 x 30mm
04.43.12.10025	Ø10 x 20mm
04.43.12.10030	Ø10 x 25mm
04.43.12.11030	Ø10 x 30mm

Optional

Ref.No.	Ø x Length
04.43.12.06035	Ø6 x 35mm
04.43.12.06040	Ø6 x 40mm
04.43.12.07035	Ø7 x 35mm
04.43.12.07040	Ø7 x 40mm
04.43.12.08035	Ø8 x 35mm
04.43.12.08040	Ø8 x 40mm
04.43.12.09035	Ø9 x 35mm
04.43.12.09040	Ø9 x 40mm
04.43.12.10020	Ø10 x 20mm
04.43.12.10035	Ø10 x 35mm
04.43.12.10040	Ø10 x 40mm
04.43.12.11020	Ø11 x 20mm
04.43.12.11025	Ø11 x 25mm
04.43.12.11035	Ø11 x 35mm
04.43.12.11040	Ø11 x 40mm

Transverse Screw





TiAlV

Ref.No.	Ø x Length
04.24.45.65040	Ø6,5 x 40mm
04.24.45.65045	Ø6,5 x 45mm
04.24.45.65050	Ø6,5 x 50mm
04.24.45.65055	Ø6,5 x 55mm
04.24.45.65060	Ø6,5 x 60mm



OutIn[®]






Instrumental for Anatomic Ligament Reconstruction

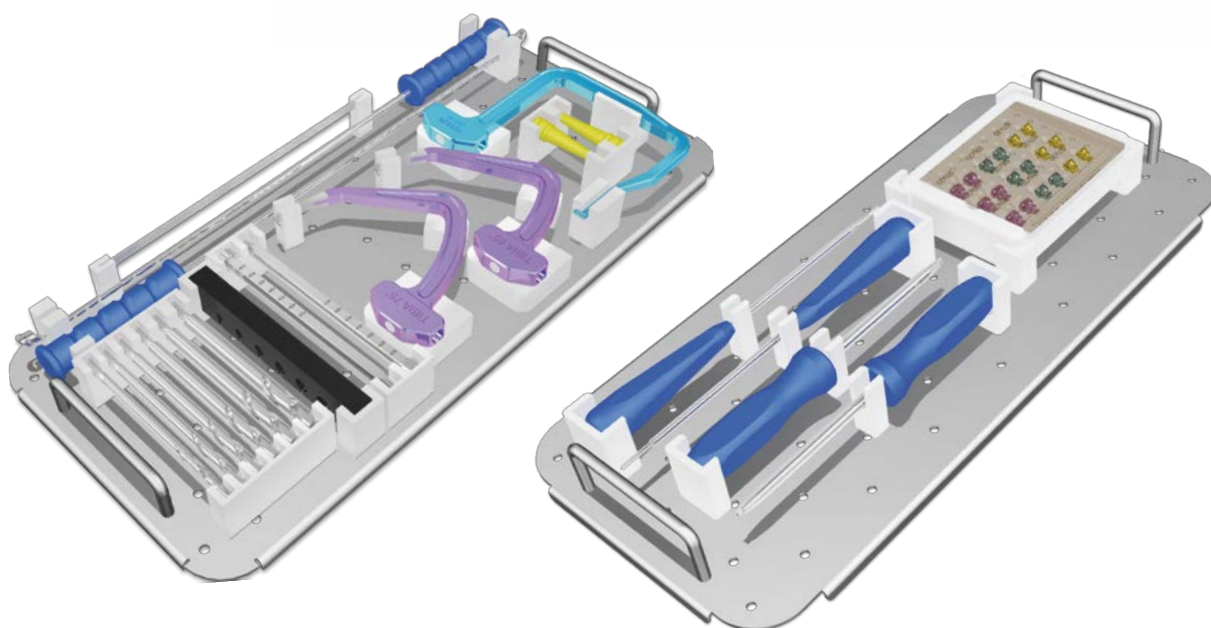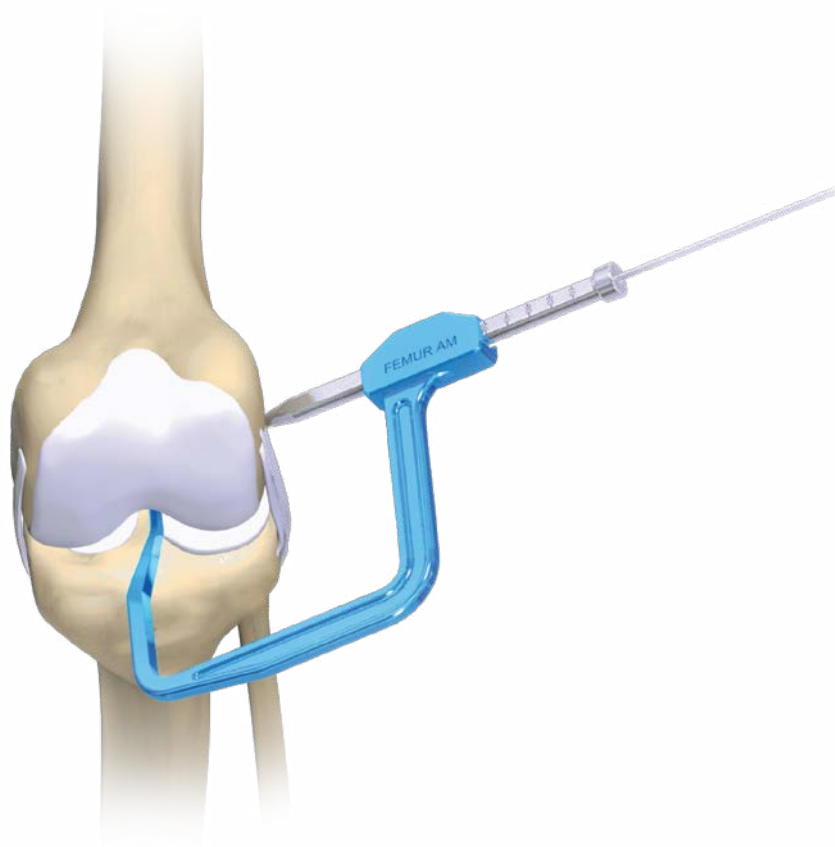



Ligfix[®]

Ligament Fixing System

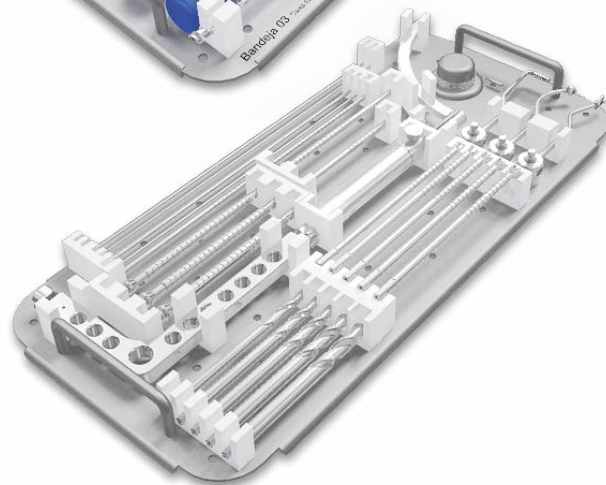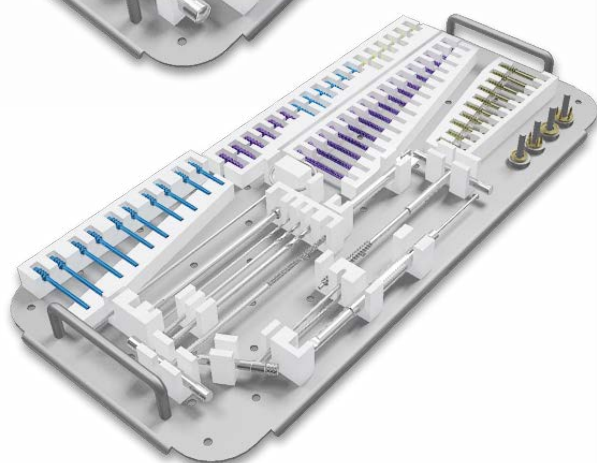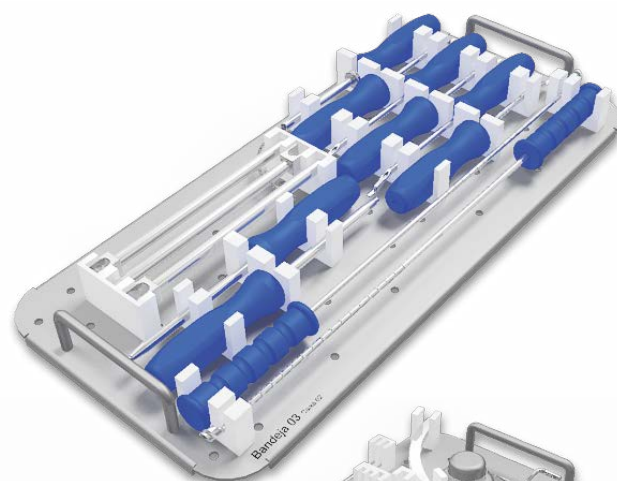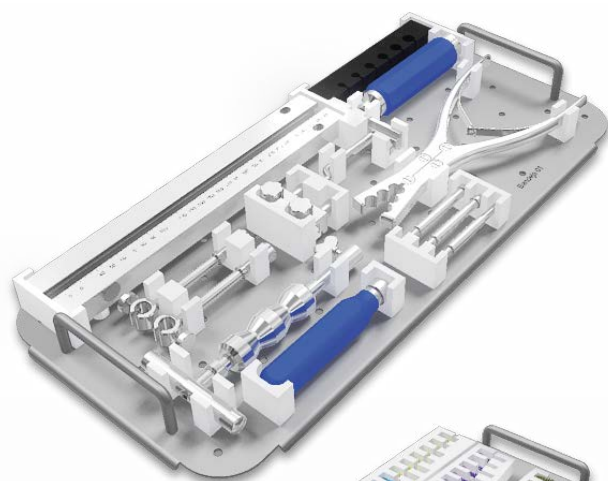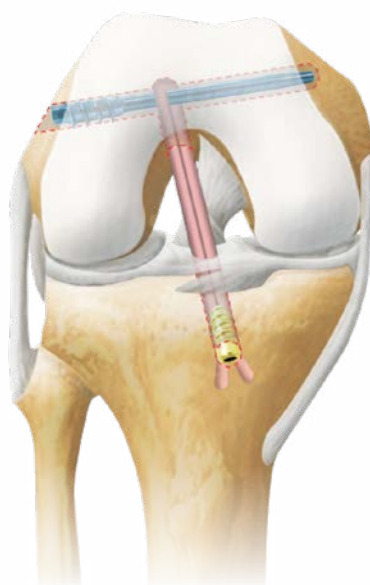

TiAlV Titanium Alloy (ASTM F-136)

PEEK Polyetheretherketone

Ref.: Product Code

Ø: Diameter

mm: Millimeters